

EXTERIOR ZINK

The solid and strong outdoor galvanised spiral staircase, perfect for every location and atmospheric condition.



Previous pages
Exterior Zink 13 steps, in galvanized steel.

Left page
Exterior Zink 13 steps, in galvanized steel and painted white (RAL 9010).

Above
Detail of the departure step in galvanized steel and non-slip embossing.


MATERIALS AND COLORS

STEPS

- In hot-dip galvanised steel
 - Anti-slip raised pattern
 - Maximum stiffness and resistance to trampling
- ### HANDRAIL
- In plastic material

Steel colors (steps, structure and railing)

Galvanised and painted
White RAL 9010



Note

Hot-dip galvanising is the best steel protection against corrosion and atmospheric agents: any imperfection of the surface is the natural consequence of this treatment.

STRUCTURE

- Consisting of hot-dip galvanised steel spacers attached to the steps


RAILING

- Hot-dip galvanised steel vertical columns (distance between the columns less than 10 cm)

MEASUREMENTS valid for all the configurations

The SYSTEM FOR ADJUSTING THE HEIGHT BETWEEN THE STEPS (RISE) allows you to:

- Obtain different heights between floors with the same number of steps.
- Obtain the height between the floors as required with more or fewer steps (this means you can find the best compromise between the step height and the space occupied by the staircase).

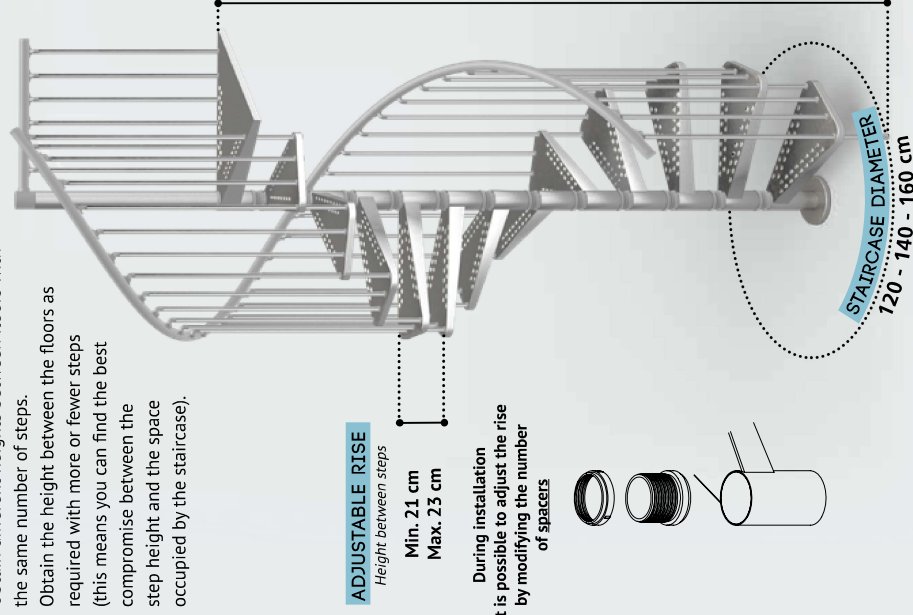


NUMBER OF STEPS	HEIGHT BETWEEN FLOORS (H)
10 steps 1 box	Min. 210 cm Max. 230 cm
11 steps 1 box	Min. 231 cm Max. 253 cm
12 steps 1 box	Min. 252 cm Max. 276 cm
13 steps 1 box	Min. 273 cm Max. 299 cm
14 steps 1 box + 1 extra step	Min. 294 cm Max. 322 cm
15 steps 1 box + 2 extra steps	Min. 315 cm Max. 345 cm
16 steps 1 box + 3 extra steps	Min. 336 cm Max. 368 cm

Add more steps to reach greater heights.


- H = Finished floor to finished floor height.
- Top universal landing fixed at the same level as the finished upper floor.
- Ceiling opening diameter: staircase diameter + 5 cm.

CONFIGURATIONS

SQUARE OPENING

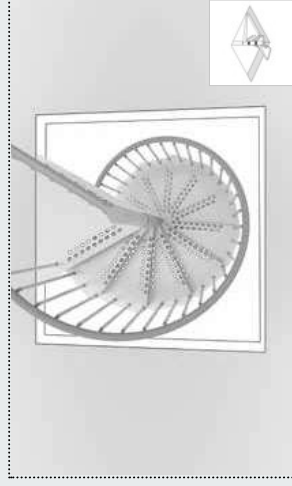

DIRECT LANDING AT THE FLOOR SLAB

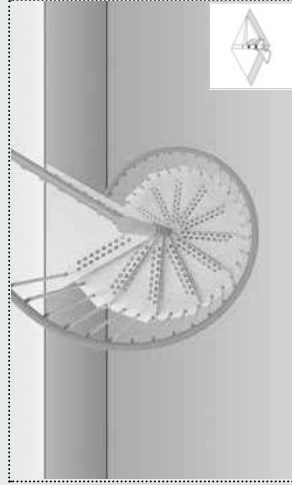


LANDING WITH 60° OPENING

PACKAGE

1 box = 1 complete staircase of 13 steps (landing included)

Structure, steps, railing, handrail



The measures of the box may vary


DIRECTION OF ASCENT

Counter clockwise



ACCESSORIES

Extra step (with structure and railing).



Extra section of internal post (needed for heights over 319 cm).

